

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 913 976 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:

17.05.2000 Bulletin 2000/20

(51) Int Cl.7: **H04M 1/02, H04M 1/00**

(43) Date of publication A2:

06.05.1999 Bulletin 1999/18

(21) Application number: **98308298.3**

(22) Date of filing: **13.10.1998**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

Designated Extension States:

AL LT LV MK RO SI

(72) Inventors:

- **Prior, Sean**
Camberley, Surrey GU15 3HJ (GB)
- **Thomas, Graham**
Camberley, Surrey GU15 1QS (GB)

(30) Priority: **31.10.1997 GB 9723085**

(71) Applicant: **NOKIA MOBILE PHONES LTD.**

02150 Espoo (FI)

(74) Representative: **Haws, Helen Louise et al**

Nokia IPR Department
Nokia (UK) Limited
Summit Avenue
Southwood
Farnborough Hampshire GU14 0NZ (GB)

(54) **A radiotelephone handset**

(57) A radiotelephone handset has a housing having a front face to be presented to the face of the user when making a call, together with a user interface comprising an audio interface and a touch interface. The touch interface includes touch input means (26) on another face (20) of the housing to the front housing, for directing the processing of voice signals supplied to the audio interface.

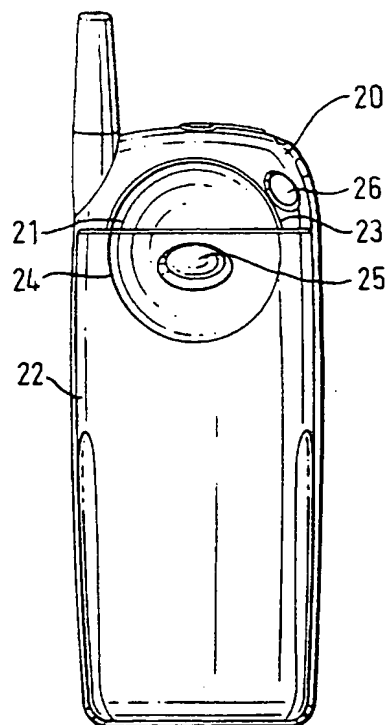


FIG. 3

EP 0 913 976 A3

THIS PAGE BLANK (USPTO)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 8298

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	DE 195 39 635 A (HOLZER WALTER PROF DR H C ING) 30 April 1997 (1997-04-30) * column 1, line 54 - column 2, line 8; figure 1 *	1,5, 11-13	H04M1/02 H04M1/00
A	---	6	
X	US 5 335 261 A (FUJINAKA AKIHIKO) 2 August 1994 (1994-08-02) * claim 1 * * column 4, line 6-15; figure 1 * * column 6, line 33-35 * * column 6, line 54-66; figure 2 *	1,14	
X	US 5 655 018 A (PATEL DHIRENDRA ET AL) 5 August 1997 (1997-08-05) * column 3, line 35-45; figure 1 *	1	
E	BE 1 011 293 A (STAAR DEV CO SA) 6 July 1999 (1999-07-06) * claim 1 * * page 3, line 7-22; figures 1-3 *	1,3,5,14	
A	EP 0 802 658 A (NOKIA MOBILE PHONES LTD) 22 October 1997 (1997-10-22) * column 1, line 1-6 * * column 5, line 15-23; figure 1A * * column 6, line 24-49; figure 2C * * column 8, line 13-21; figure 3A *	1,8,10	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6) H04M
Place of search THE HAGUE		Date of completion of the search 24 March 2000	Examiner de Biolley, L
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 8298

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information

24-03-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19539635 A	30-04-1997	NONE	
US 5335261 A	02-08-1994	JP 4207341 A	29-07-1992
US 5655018 A	05-08-1997	NONE	
BE 1011293 A	06-07-1999	NONE	
EP 0802658 A	22-10-1997	JP 10097370 A	14-04-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 913 976 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
06.05.1999 Bulletin 1999/18

(51) Int Cl.⁶: H04M 1/00, H04M 1/02

(21) Application number: 98308298.3

(22) Date of filing: 13.10.1998

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 31.10.1997 GB 9723085

(71) Applicant: NOKIA MOBILE PHONES LTD.
02150 Espoo (FI)

(72) Inventors:
• Prior, Sean
Camberley, Surrey GU15 3HJ (GB)
• Thomas, Graham
Camberley, Surrey GU15 1QS (GB)

(74) Representative: Haws, Helen Louise et al
Nokia IPR Department
Nokia (UK) Limited
Summit Avenue
Southwood
Farnborough Hampshire GU14 0NZ (GB)

(54) A radiotelephone handset

(57) A radiotelephone handset has a housing having a front face to be presented to the face of the user when making a call, together with a user interface comprising an audio interface and a touch interface. The touch interface includes touch input means (26) on another face (20) of the housing to the front housing, for directing the processing of voice signals supplied to the audio interface.

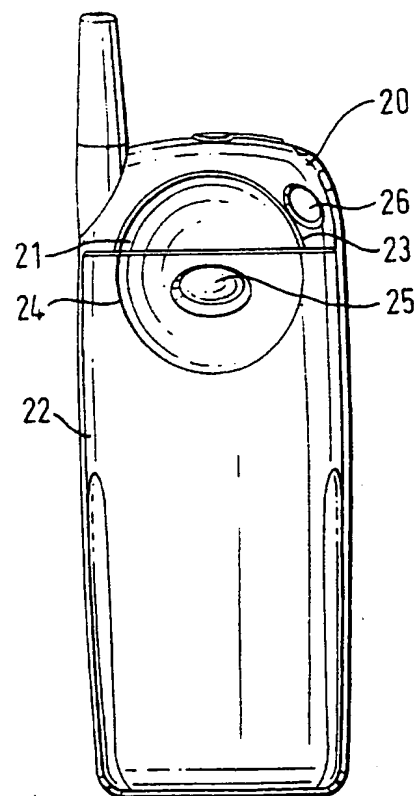


FIG. 3

EP 0 913 976 A2

Description

[0001] The invention relates to a radiotelephone handset and user interface thereeto.

[0002] The user interface, i.e. those elements of the handset that interact with the user is of vital importance. Important user interface considerations include, the ease with which the phone can be operated, the ease with which it can be transported and the comfort of use.

[0003] In the past, emphasis has been placed on designing the front of a handset, making it smaller and designing relatively large displays that allow information to be clearly presented to a user. As handsets become smaller they are better adapted for single hand operation. With this comes a range of other considerations.

[0004] Single handed operation of a radio telephone has clear advantages. These can only be realised effectively if the user finds it comfortable to operate the telephone when it is held in one hand. As modern phones are becoming increasingly small it is for the phone designer to assist in design of the phone to promote single handed operation.

[0005] According to the present invention, there is provided a radiotelephone handset comprising a housing having a front face to be presented to the face of the user when making a call, the handset having a user interface comprising an audio interface and a touch interface, wherein the touch interface includes touch input means on another face of the housing for directing the processing of voice signals supplied to the audio interface.

[0006] The provision of user input means off of the front face of the handset makes it more accessible to the user when he is using the audio interface (e.g. loudspeaker and/or microphone), for example when in a call. The touch input means is preferably provided towards the top of the housing so as to promote single handed operation of the handset because the touch input means can then be readily reached by the fingers of the hand holding the handset.

[0007] The touch input means may be provided on the top or a side face of the housing. Provision on the top face enables the touch input means to be readily accessed, for example when the handset is in loudspeaker mode on a deskstand. However, it is more suitably positioned on the rear of the phone, as it is then in a very comfortable position for the user when operating the handset with one hand. Also, it is preferable to positioning the touch input means on a side face as manufacturing is simplified. Positioning of components such as keys can be restricted to along the z axis.

[0008] As mentioned above, handset is provided with touch input means for directing the processing of voice signals supplied to the audio interface. The touch input means may, for example, provide voice recognition and/or voice recording functions. When operating in a voice recognition mode, the touch input means may direct the storage and retrieval of data according to the user's

instructions. For example, it may control the contents of the phone's memory to store and retrieve phone numbers. Alternatively, when operating in voice recording mode, the touch input means may record the user's voice, the other party's voice or both, either for a selected portion of a call or throughout.

[0009] The handset may comprise a display, and the touch input means may manipulate the contents of that display. The touch input means may also provide other functions, such as other in call functions (e.g. sending/ending calls). The handset may also comprise further user interface features, such as further touch input means (alphanumeric keypad, power key, other function keys etc.). These further features may appear on various faces of the phone, although preferably those with associated in call functions appear on the back of the handset.

[0010] The invention will now be described in greater detail with reference to figures 1 to 11 of the drawings of which:-

figure 1 is a perspective view of a radiotelephone handset;

figure 2 is a side view of the handset of figure 1;

figure 3 is a rear view of the radiotelephone handset of figure 1 according to an embodiment of the present invention;

figure 4 is a top plan view of the handset of figure 1;

figure 5 is a bottom plan view of the handset of figure 1;

figures 6 to 11 illustrate radiotelephone handsets according to alternative embodiments of the present invention;

figures 12 illustrates scrolling a new menu on the display using a single softkey, such as that of the handset in figure 8;

figure 13 illustrates the selection of a phone number from a phone book using a single softkey; and

figure 14 illustrates scrolling an alternative menu on the display according to an embodiment of the present invention.

[0011] Figure 1 shows a handset 1 according to an embodiment of the invention. The handset 1 comprises a user interface having a keypad 7, a display 3, an on/off button 4, an earpiece 5, and a microphone 6. The keypad has a first group 7 of keys in the form of alphanumeric keys, by means of which the user can enter a telephone number, write a text message (SMS), write a name (associated with the telephone number), etc.

The user uses the first group of keys primarily for entering data in the telephone (enter events).

[0012] The keypad additionally comprises a second group of keys which, in this embodiment, comprises operation keys 8 or soft keys whose function depends on the present state of the telephone. The default function or the present function of the operation key 8 is displayed in a predetermined area of the display 3. The second group of keys additionally comprises a scroll key 9 by means of which the user can scroll selectively from one item to the preceding or the succeeding item in the menu loop of the telephone, while he gets access to a submenu loop under the item concerned in the main menu loop by activation of the operation key. The keypad additionally has a send key 10a and an end key 10b, which respectively may be used for initiating and ending a call.

[0013] The handset may be used in connection with telephone networks, such as GSM and AMPS cellular networks and various forms of cordless telephone systems. A microphone records the user's speech, and the analog signals formed thereby are A/D converted in an A/D converter before the speech is encoded in an audio codec unit. The encoded speech signal is transferred to a physical layer processor, which, for example, supports the GSM terminal software. The processor also forms the interface to the peripheral units of the apparatus, including the display and the keypad (as well as SIM, data, power supply, RAM, ROM, etc.). The processor communicates with an RF part via a baseband converter and a channel equalizer. The audio codec unit speech-decodes the signal, which is transferred from the processor to an earpiece via a D/A converter.

[0014] In this embodiment, the phone is also provided with a headset connector, the cover 41 for which can be seen in Figure 4. When the headset is connected to the connector, the processor causes the decoded received speech signal to a loudspeaker of the headset, as opposed to the phone's earpiece. This provides improved privacy.

[0015] Moving user interface features from the front face of the handset to another face or faces enables the phone to be reduced in size, particularly in length. Moreover, it often results in an ergonomically improved handset. For example, keys placed on the rear of the handset assist single handed operation, enable more accurate operation as they are actuated using a finger instead of a thumb, and are more accessible when the user is in a call. Also, the user's view of the display is not hindered by the presence of a thumb across the front of the phone when selecting menu options, for example. Various types of user interface input means positioned off of the front face of the handset are exemplified in the accompanying drawings.

[0016] Figure 3 illustrates the rear cover 20 of the handset shown in Figure 1. A scooped recess 21 can clearly be seen located partly in the rear cover of the handset above a battery pack 22 and partly in the rear

casing of the battery pack 22 and extending toward the top of the rear cover 20 of the handset 1. The scooped recess 21 is positioned substantially behind the handset's display 3 and in a position arranged to comfortably accommodate the user's fingers when the earpiece 5 of the handset is held to the user's ear.

[0017] The scoop is laterally confined by banks 23, 24 within the margins of the rear cover of the handset and the battery pack. The addition of a scooped recess encourages the user to hold the phone in a particular way as the feel of the phone in the hand is enhanced if one of more of the user's fingers are placed in the scooped recess. The position of the scoop can be used to encourage the user to hold the handset in a predetermined manner which can be used to enhance the operating characteristics of the radiotelephone handset particularly those related to single-handed operation of the handset.

[0018] The scooped recess improves the ergonomics of the handset. Such positioning enables the handset to be operated more comfortably by the user. It is particularly agreeable to hold the handset in one hand and operate the keys on the front face of the handset with the thumb. The natural position the hand is inclined to take when nestling a handset with a scooped recess in accordance with this embodiment of the present invention means that the alphanumeric keys and in particular the scroll key are within reach for the user's thumb as it moves naturally across the front face of the phone. No unnatural extension of the thumb along a vertical axis is required to operate the scroll key. Also, the depression of the scroll key only requires movement of the thumb from its socket and does not require any other hand movement. Hence, the handset can be held and readily operated using the same hand.

[0019] The positioning of the scroll key 9 obliquely improves the ergonomics of the handset. Such positioning enables the key to be operated more comfortably by the user. It is particularly agreeable as the two depressible elements of the scroll key are within reach of the user's thumb as it moves naturally across the front face of the phone. No unnatural extension of the thumb along a vertical axis is required. Also, the depression of these elements of the scroll key 9 only requires movement of the thumb from its socket and does not require any other hand movement. Hence, the handset can be held and the scroll key readily operated using the same hand.

[0020] Although depicted in this embodiment located partly in the rear cover of the handset and partly in the rear casing of the battery, the scooped recess 21 could, in other embodiments, be formed wholly in either. The scooped recess 21 could be larger or smaller than that depicted. The design and position of the recess is not critical, it is desirably, however, configured to accommodate finger tips of a user when holding the radiotelephone handset 1 to the ear during conversation. However, the position of at least a portion of the recess directly above the battery 22, makes it easier for the user

to depress any release mechanism 25 for withdrawal of the battery.

[0021] In this figure, the handset comprises a user interface in the form of a single key 26 in a top corner of the rear cover 20 of the handset. This key may have a dedicated function or it may be a softkey.

[0022] For example, the key 26 may have a dedicated function, such as a voice recognition function, which enables the user to store and retrieve data from the handset's memory (e.g. phonebook function). In such a case, the user could press the key to activate the voice recognition mode. He would then give the requisite instructions/data orally into the microphone 6, which in turn would convert them into electrical signals which the processor would then process. The processor matches instructions with predetermined stored instructions, and controls the handset accordingly. For example, if the instruction was to save, the processor would save the subsequent data input by the user either orally or via the alphanumeric keypad. Alternatively, if the command was to retrieve a phone number from the phonebook, then the processor would endeavour to match the data input by the user to a stored phone book entry. If a match occurred, data would be retrieved and would ideally be output by the loudspeaker, and may additionally be displayed on the display 3. The key 26 could then be used to verify the retrieved data is correct, and thus cause the number to be dialled. At the end of the call the user may end the call by pressing this button again.

[0023] An alternative dedicated function for this key would be a voice recording function. In this case, the user could press the key during a call to record the whole or part of a conversation (e.g. just for a period, and/or just the user's voice or just the other party's). For example, the user could press the key once to activate recording and press it a second time to end recording.

[0024] On the other hand, the key 26 may be a softkey. For example, it might provide both of the aforementioned functions, the voice recognition function when the phone is in an idle state (e.g. when a call is not in progress) and the voice recording function when a call is in progress (or at least when voice signals are received by the earpiece and/or the microphone).

[0025] Figure 6 shows alternative user interface features on the rear of a handset. This handset comprises an user interface input 60 which manipulates the contents of the display. This input 60 may be, for example, a touch screen, a single key, an array of keys a mat having a pressure sensitive region or regions, or the like. In the embodiment shown, the user interface input 60 is a touchpad which has a plurality of pressure sensitive regions 64-66. The display has regions corresponding to these, as referenced 61-63 in Figure 6(b). Preferably the corresponding regions of the touchpad mirror those of the display. This assists the user in accurately selecting the function shown in a particular region of the display. The input 60 may comprise regions which have a dedicated function, which operate as a softkey or a combi-

nation of both. In the example shown, the regions 65 and 66 of the touchpad have dedicated functions, namely send and end call functions as indicated in corresponding display regions 62 and 63. However, region 64 of the touchpad may operate as a softkey, for example, as the key 26 of Figure 3 does. Its function can be indicated by an icon in the corresponding region of the display, so that the user knows which region of the rear of the handset to press to select a voice recognition function when the phone is in an idle state (e.g. when a call is not in progress) and a voice recording function when a call is in progress (or at least when voice signals are received by the earpiece and/or the microphone).

[0026] The handset also has a separate key 67. An advantage of such a key is that it can be readily found by the user during a call, without having to look at the phone's display, for example. Hence, it may be preferable to have an in call function such as voice recording function associated with this key, as opposed to (or as a short cut to) being associated with the input 60.

[0027] The provision of a user interface input 60 for manipulating the contents of a display on the rear of the handset has a number of advantages. Primarily, it enables the user to hold the handset and control the display information with one hand. It is advantageous to have a separate touchscreen to the actual display as the display will not get dirty and its content obscured by dirt or the user's hand. Moreover, in single handed use, a user interface input on the front of the phone require thumb operation, whereas such an input on the rear can be operated by a forefinger, which is much smaller and more agile than a thumb, and thus provides greater accuracy. As will be appreciated this is important if reductions in the size of a handset is of consideration.

[0028] A further consideration is the elimination of function keys from the front of the handset, thus enabling a reduction in its length. For example, the provision of the regions 62, 63 on the display and corresponding regions 65, 66 on the touchpad 60 in figure 6(a) has resulted in the elimination of send and end keys (referenced 10a and b in Figure 1) from the front face of the phone.

[0029] Figure 7 shows a handset with an alternative user interface input 70 which manipulates data on the display, and eliminates the need for function keys on the front of the phone. In this case, the soft keys referenced 8 in Figure 1, which are conventionally associated with menu and memory functions, have been replaced by regions 71 and 72 of the input 70, and the send and end keys 10a and 10b by single region 75. This embodiment also has a separate key 74, which may again be used for a function concerned with the processing of voice signals supplied to the audio interface of the handset, such as a voice recognition and/or recording function.

[0030] Figure 8 shows an alternative user interface input on the rear of the handset. In this case, the handset comprises an operation or softkey 81 associated with the display and another key 82, which, as in the previous

examples, can be a key having a dedicated function or a softkey. Again, this key 82 is ideally suited to a function or functions which might be required when the user has the handset to his face, such as during a call. The softkey 81 can be used to select the requisite menu options etc. from the display. Such operations are shown in figures 12 to 14 and described below.

[0031] The processor, which serves as the controller unit in a manner known per se is connected to the user interface. Thus, it is the processor which monitors the activity in the telephone and controls the display in response thereto. Therefore, it is the processor which detects the occurrence of a state change event and changes the state of the telephone and thus the display text. A state change event may be caused by the user when he activates the keypad, which is called an entry event, and also by the network connection of the telephone or by another event beyond the user's control, which is called a non user event. Non user events comprise status change during call set-up, change in battery voltage, change in antenna conditions, message on reception of SMS, etc.

[0032] The use of a single soft key is based on the idea that the telephone can assume a plurality of predetermined states 40.1-40.n, which is illustrated in figure 12. A plurality of actions (options 41.1-41.n) may be performed in these states 40.1-40.n. The display image at arrival to state 40.1 may be a telephone number or the name of a person contained in the phonebook of the telephone, which is indicated by "state". "State" might also cover "incoming calls", "E-mail received", "SMS received", etc. If the display contains a telephone number, the default function 42.1-42.n might be "call". The scroll key 9 allows scrolling from the default function to the group of possible functions, to which the default function belongs. Preferably, the scroll key 9 scrolls between the default function and the group of possible functions (options), but switches to scrolling between items in the group of possible functions, once this group has been selected by means of the soft key 81. The state is maintained during such operations.

[0033] As can be seen from figure 12, a state change event will result in a change from one state to another. The new state depends on the old state and the nature of the state change event. During an established call ("call established" state), the default function of the soft key 81 will, according to the preferred embodiment be "end". If a new incoming call "is waiting", the user may use the scroll key 9 to scroll the option list including items such as "end", "join", "answer" and "swap" onto the display without interrupting the call.

[0034] Each state 40.1-40.n is associated with a predefined group of functions, actions or options 41.1-41.n, which are possible precisely for that state. A preferred function serving as the default function 42.1-42.n is designated in each of these groups. This designation may be performed by the programmer during programming, by the user, through his redefinition of the default func-

tion, or by the telephone itself in that it records the frequency of the use of the individual functions and appoints the most frequently used one in each group as the default function - optionally with the user's acceptance.

[0035] When the telephone changes its state, the soft key 81 can perform the default function if it is activated, and the user may scroll between the default function and the whole group of options by means of the scroll key 9. If the group of options is selected with the soft key, the user is able to scroll through the group of options with the scroll key and to select the desired (designated) function with the soft key.

[0036] When a function is selected with the soft key 81, the processor runs the associated program sequence to execute the function.

[0037] Figure 13 shows the role of the soft key 81 to select a phone number from an address book according to a preferred embodiment of the invention. The display text is simultaneously indicated with the keys of the keypad which have been activated (or in response to voice in a voice recognition system). The display 3 has a display image 120 ("idle mode" state) which shows the function of the soft key 81 as a highlighted bar in a predetermined area (soft key display) 121 of the display. The function of the soft key 81 in the idle mode in this embodiment is to gain access to the main menu loop of the telephone. The upper part of the display 120 shows an identification of the network operator concerned (here TDK-MOBIL). The display may additionally contain an indicator of the antenna signal strength and a battery voltage indicator. These are not shown in the figures, as they have no importance to the description of the default function.

[0038] When the soft key 81 is activated establishment of a call is attempted, which causes the telephone to change to a "call established state" under the control of the processor, and the new function "end" of the soft key 81 is now displayed in the soft key display 121. It is shown at the same time in the display that it is attempted to establish a call, which is done by the indication "calling...". The number to which the connection is to be established is still displayed in the main area 123 of the display.

[0039] The scroll key 9 is used at the idle mode display image 120 stage to gain access to the phonebook of the telephone under the main menu loop. This causes the telephone number and the name code of the first storage location in the phonebook to be displayed in the display. The telephone changes to the "number handling state", and the new default function "call" of the soft key 81 is now displayed in the soft key display 121. By continued use of the scroll key 9, the user will be able to scroll through the phonebook until he finds the number he wants. As the soft key 81 maintains its "call" function as the default function, the call can still be established by depression of the soft key 81. Then, the call can be established and terminated as follows.

[0040] When the call has been established, this can be indicated by displaying "connected" at the top of the display and by an indication of the telephone by means of which the call has been established. The identification in this instance is a name code 123a. The default function of the soft key 81 will still be "end", which is shown in the soft key display 121. If the soft key 81 is activated once more, the call will be interrupted, and the telephone will return to the "idle mode state" with the idle mode display image 120.

[0041] Figure 14 shows the use of the soft key 81 to select an alternative menu onto the display. The "idle mode state" with the display image 120 (idle mode display) can be changed to a main menu by activating the soft key 81. Here, access to the phonebook is presented as default. If the user selects this, he may choose between the individual submenu items in the phonebook shown on the display by image 126. If, alternatively whilst in the "idle mode state", the user had instead begun to enter a telephone number, the telephone would have changed to a "number handling state" with a display image 127 with "call" as the default function. The user may in this case switch to possible functions in this state (display image 128) by scrolling such functions on the display using the scroll key 9. These functions comprise the submenu items (display image 126) of the phonebook, and the requisite one may be selected by scrolling the cursor to highlight it and then pressing the soft key 81. If, instead, the user had selected the default function in the "number handling state", the telephone would have started establishment of a call (display image 129).

[0042] In figure 8, the scroll key 9 is on the front face of the phone. However, alternatively it could be placed on the rear of the phone so as to minimise the number of function keys required and to eliminate them totally from the front face of the phone. One such arrangement can be seen in Figure 9, which shows a single soft key 91 and a scroll key 92 on the rear face of the handset. The scroll key is slanted so as to improve the ergonomics of the handset and make it more comfortable for the user's index finger, as described above with respect to the user's thumb when the key is on the front face.

[0043] Figures 10 and 11 show alternative user interface input means on the rear face of a handset. They have finger actuable rolling means 101, 111 which control the menu options on the display. Figure 10 shows a finger wheel which can provide scrolling action in two directions along a single axis and figure 11 shows a finger ball which can provide a scrolling action along further axes. Manipulation of the display is achieved under processor control in accordance with control signals corresponding to the direction and speed of rotation of the rolling means. This is explained in further detail in EP0463856. The menu options can be selected either by pressing on the rolling means or by pressing a separate key 102, 112.

[0044] In view of the foregoing description, it will be

evident to a person skilled in the art that various modifications may be made within the scope of the claims.

5 Claims

1. A radiotelephone handset comprising a housing having a front face to be presented to the face of the user when making a call, the handset having a user interface comprising an audio interface and a touch interface, wherein the touch interface includes touch input means on another face of the housing for directing the processing of voice signals supplied to the audio interface.
2. A radiotelephone handset as claimed in claim 1, wherein the touch input means is provided towards the top of the housing.
3. A radiotelephone handset as claimed in claim 1 or 2, wherein the touch input means is provided on the rear face of the housing, which face is to be supported by the palm of the user when making a call.
4. A radiotelephone handset as claimed in claim 1 or 2, wherein the touch input means is provided on the top face of the housing.
5. A radiotelephone handset as claimed in any preceding claim, wherein the user interface further comprises a display provided on the front face of the housing.
6. A radiotelephone handset as claimed in any preceding claim, wherein the touch interface comprises further touch input means on the front face of the housing.
7. A radiotelephone as claimed in claim 6, wherein the further touch input means comprises one or more of a numeric keypad, an alphanumeric keypad, a power key, a function key, a group of function keys.
8. A radiotelephone handset as claimed in any preceding claim, wherein the touch input means provides further functions.
9. A radiotelephone handset as claimed in claim 8, wherein the touch input means provides call functions.
10. A radiotelephone handset as claimed in claim 5, or claim 8 or 9, when dependent upon claim 5, wherein the touch input means manipulates the contents of the display.
11. A radiotelephone handset as claimed in any pre-

ceding claim, wherein the touch input means is operable in a voice recording mode, to direct the storage of data corresponding to voice signals supplied to the audio interface.

12. A radiotelephone handset as claimed in claim 5, wherein the audio interface comprises an audio input means for receiving voice signals from the user, and the touch input means directs the storage of data corresponding to the voice signals received by the audio input means.

13. A radiotelephone handset as claimed in claim 5 or 6, wherein the audio interface comprises an audio output means for outputting voice signals corresponding to radio signals received by the radiotelephone, and the touch input means directs the storage of data corresponding to the voice signals output by the audio output means.

14. A radiotelephone handset as claimed in any preceding claim, further comprising memory means, wherein the touch input means is operable in a voice recognition mode, to direct the processing of voice signals supplied to the audio interface to control the contents of the memory means.

15. A radiotelephone handset as claimed in claim 8, wherein the touch input means directs the processing of voice signals to retrieve contents of the memory means.

5

10

15

20

25

30

35

40

45

50

55

This Page Blank (uspto)

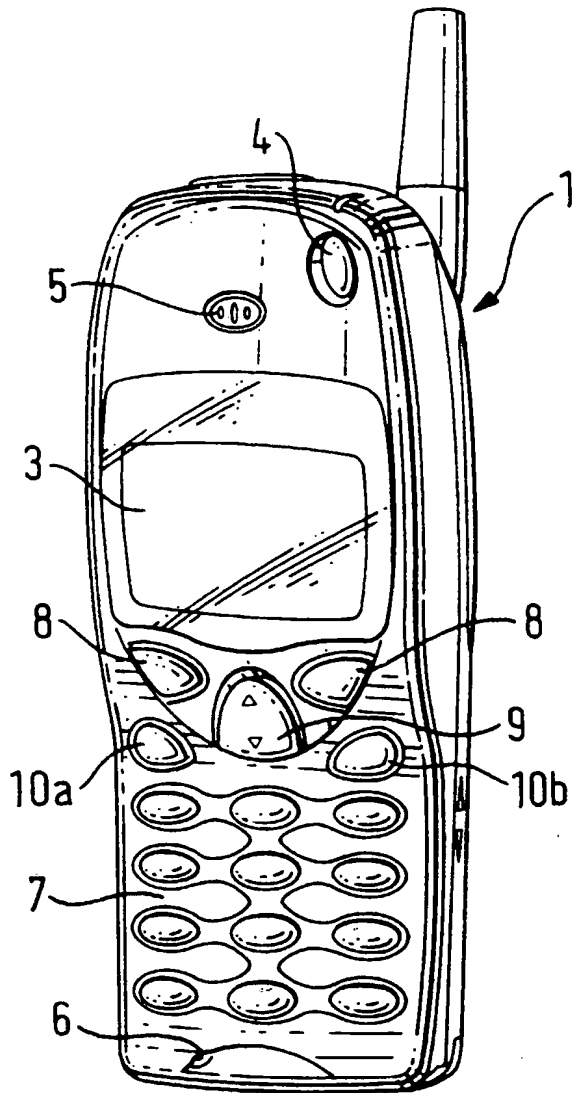


FIG. 1


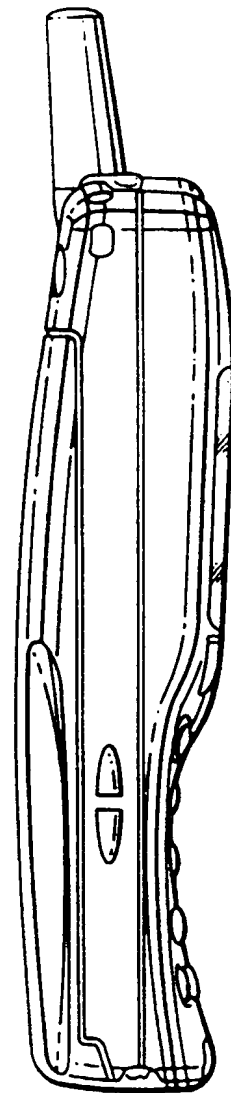



FIG. 2



207

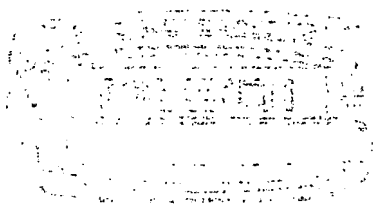

207

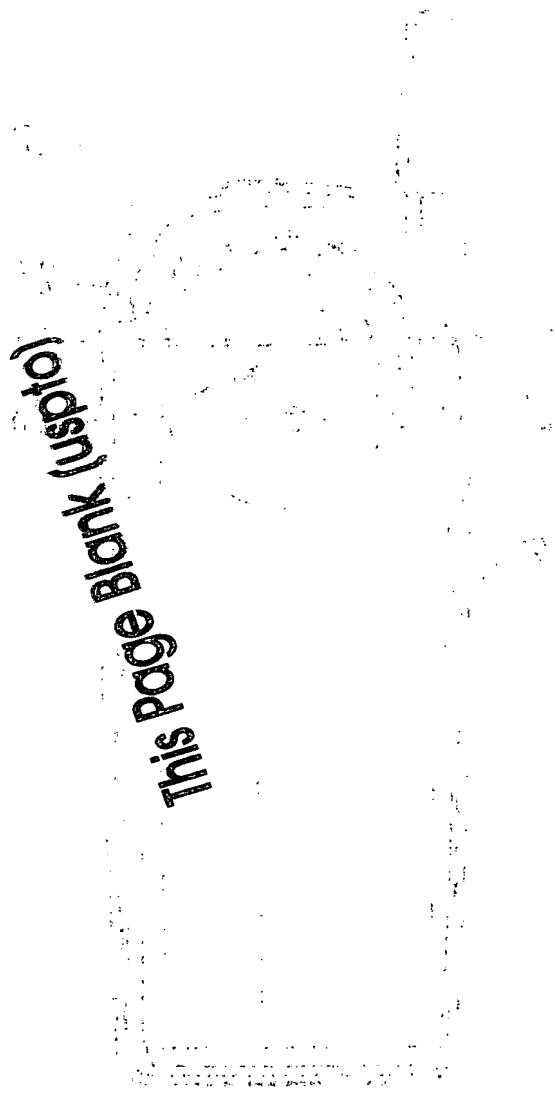

This Page Blank (uspto)

207

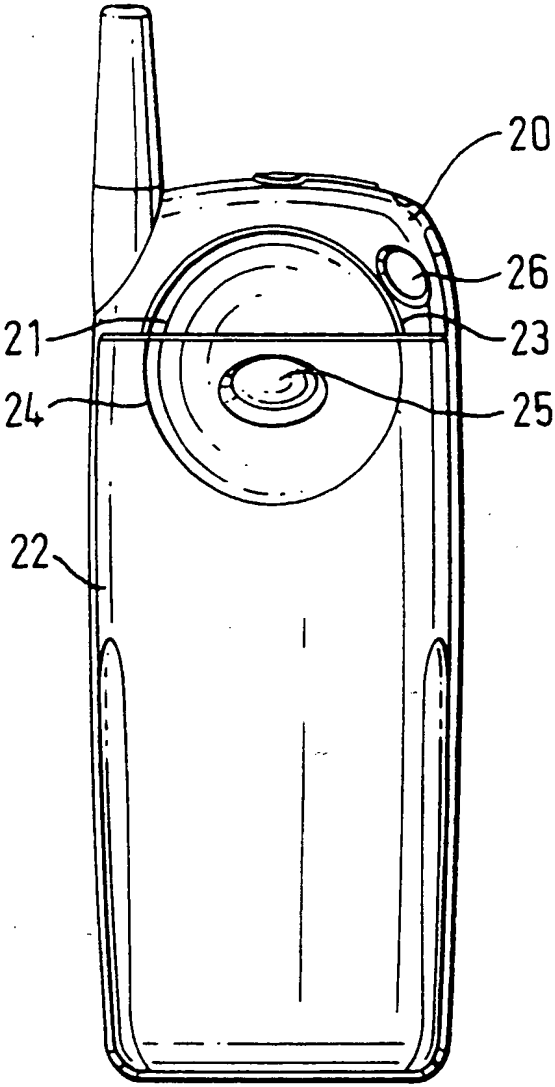


FIG. 3

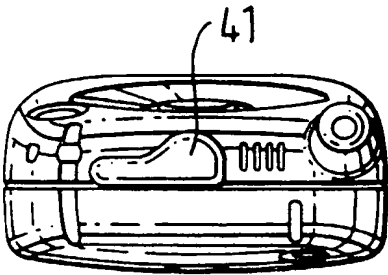


FIG. 4

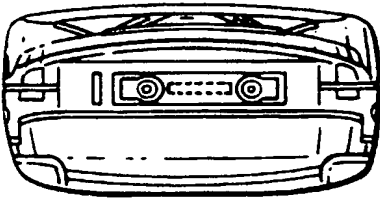


FIG. 5



This Page Blank (uspto)



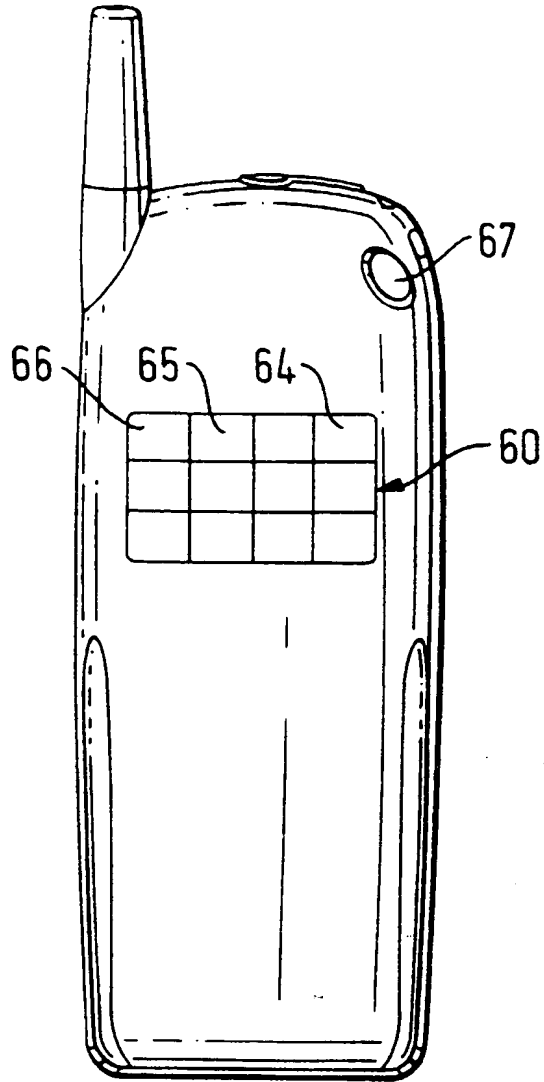


FIG. 6a

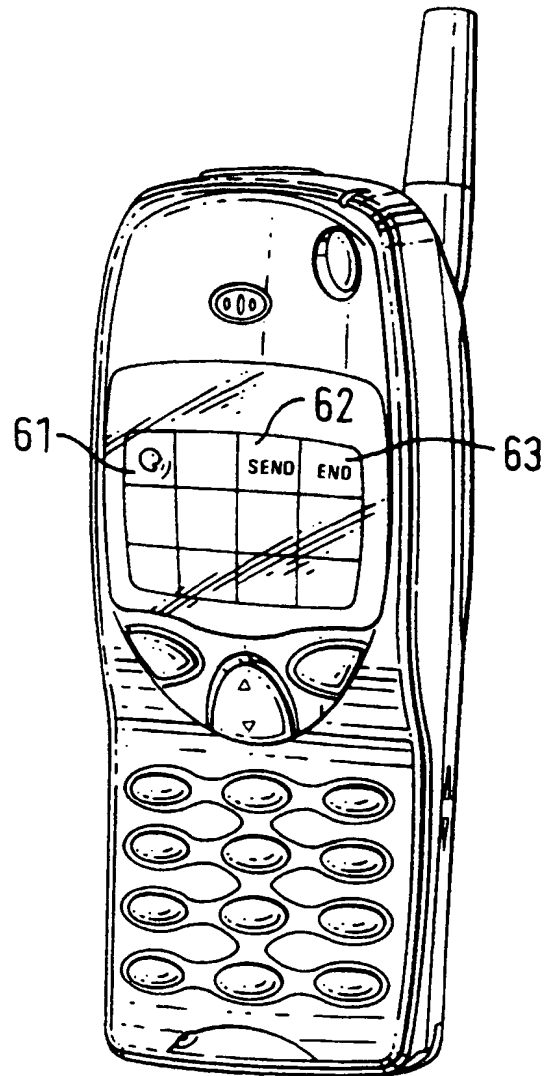


FIG. 6b

This Page Blank (uspto)

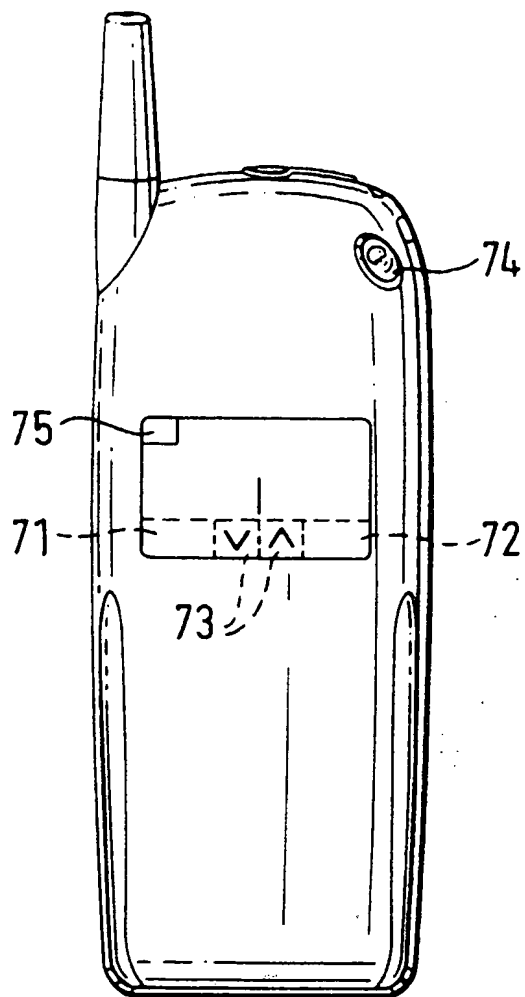


FIG. 7a

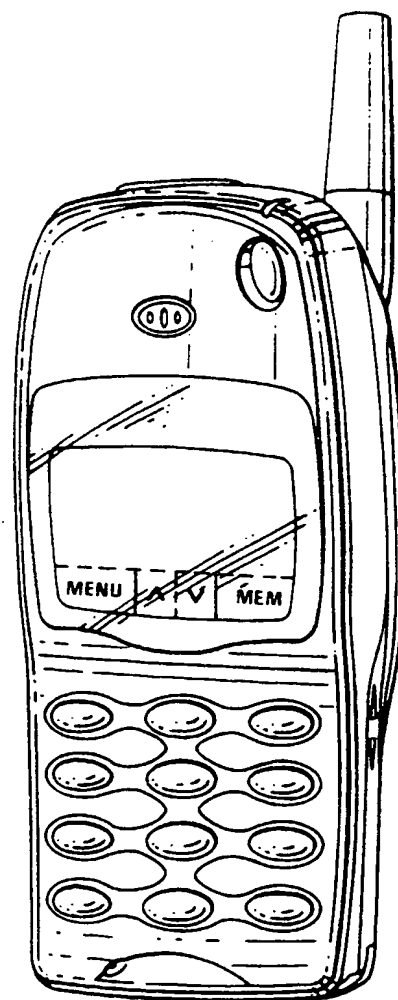


FIG. 7b



This Page Blank (uspto)



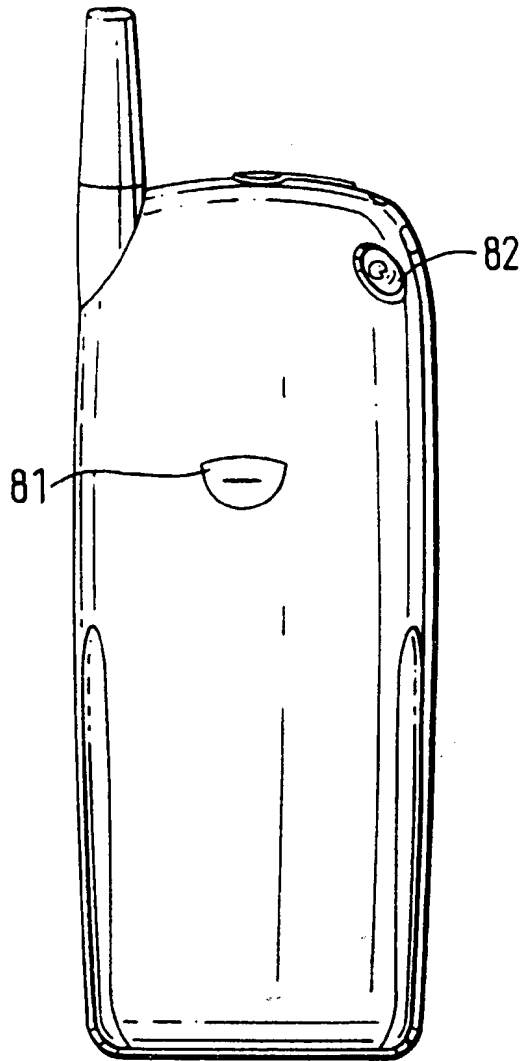


FIG. 8a

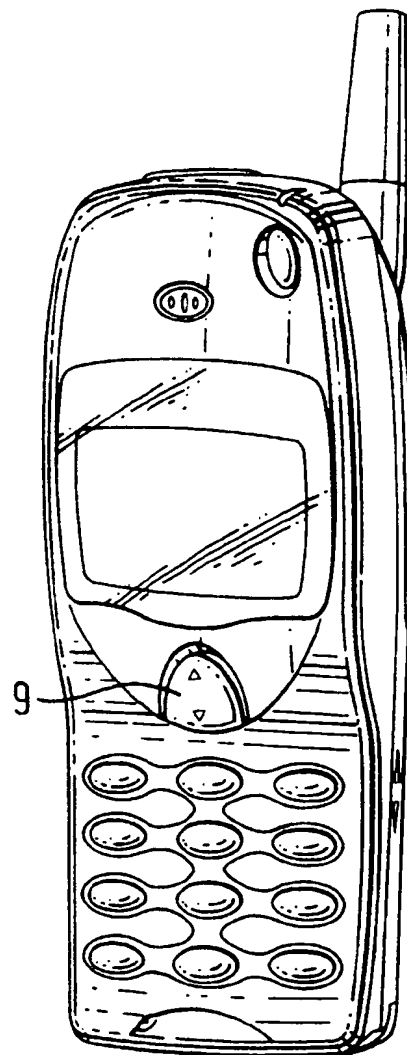


FIG. 8b

This Page Blank (uspto)

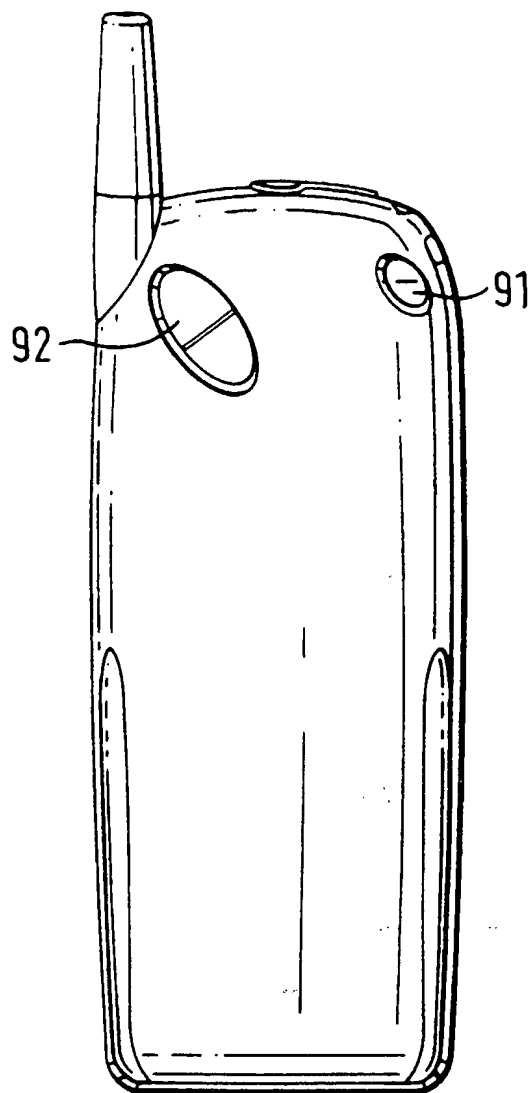


FIG. 9a

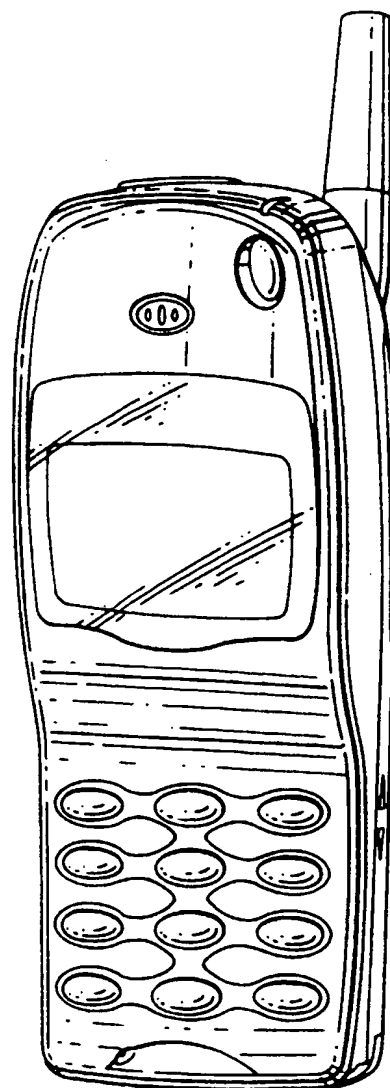


FIG. 9b

This Page Blank (uspto)

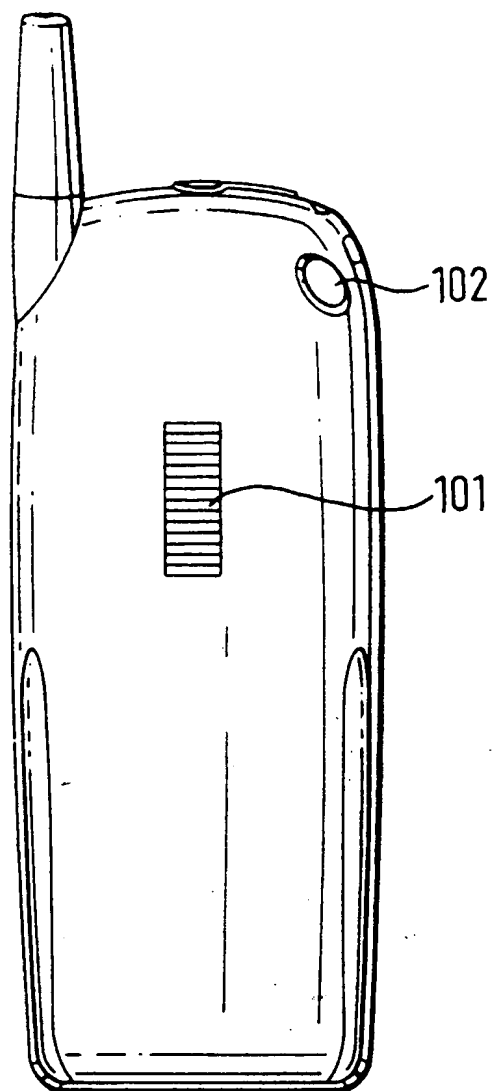


FIG. 10

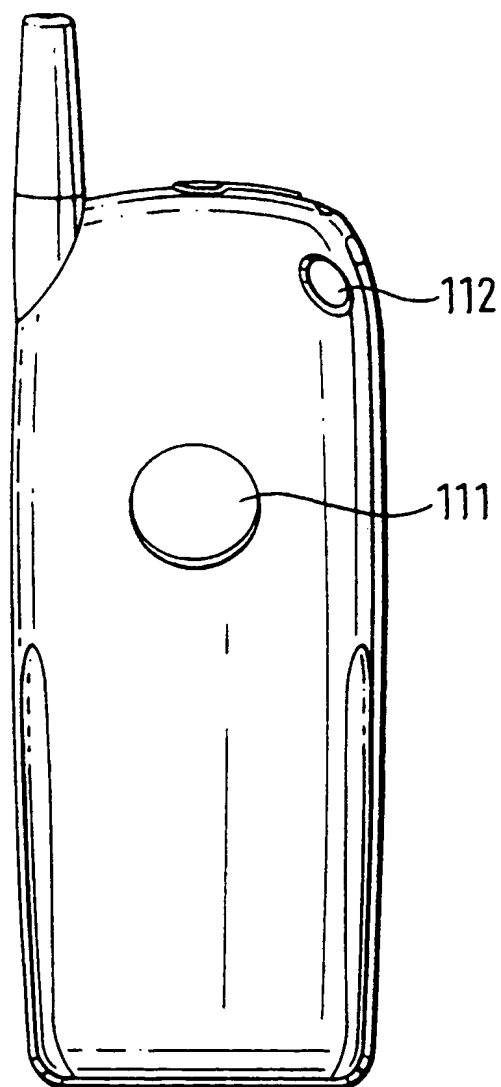


FIG. 11

This Page Blank (uspto)

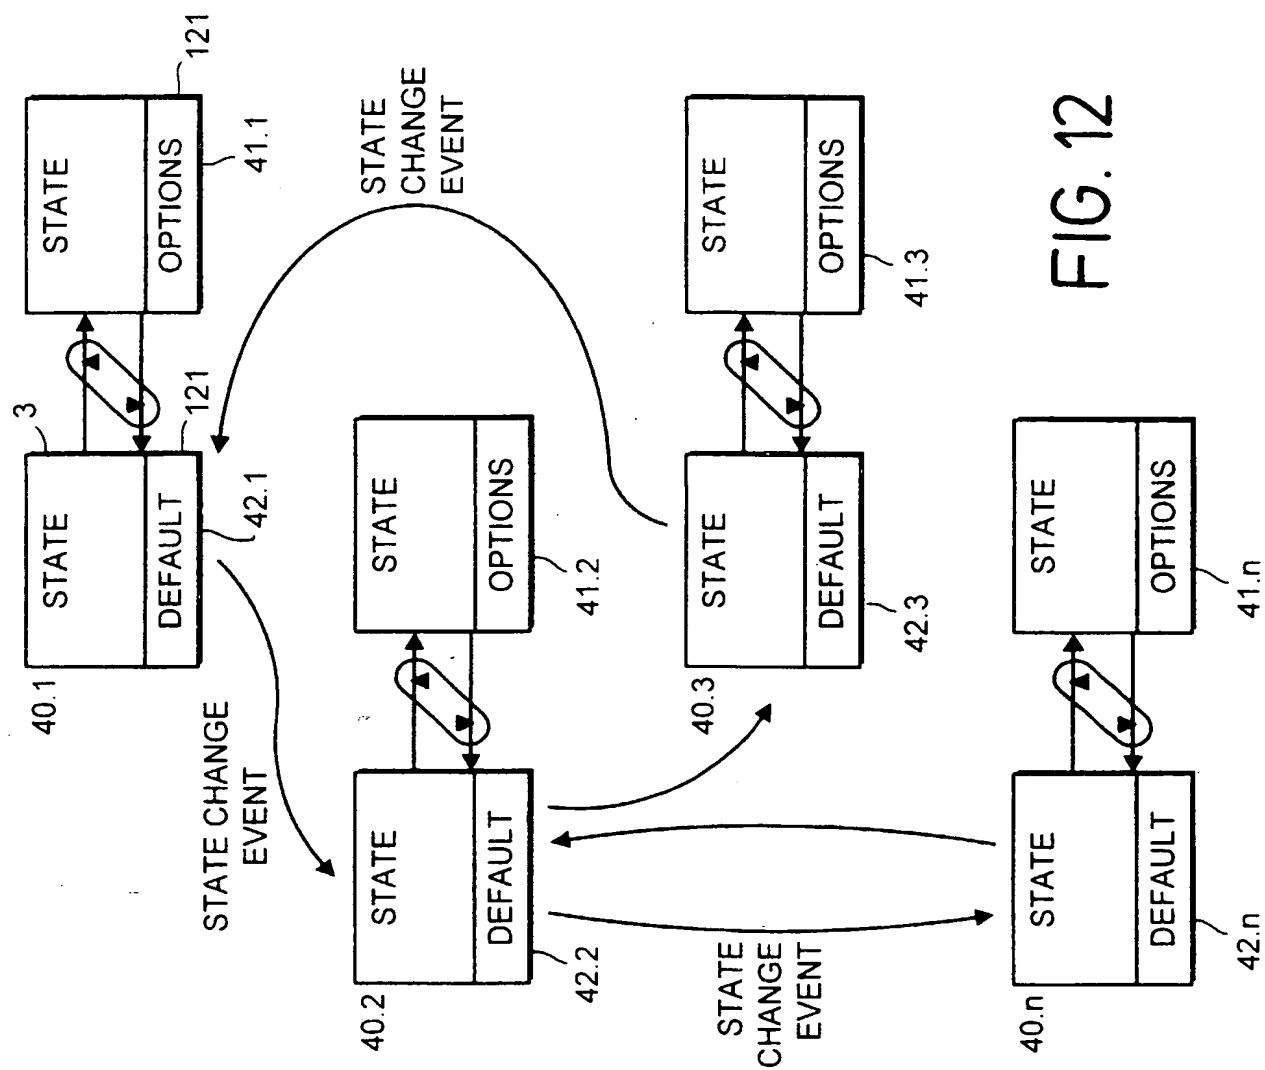


FIG. 12

This page Blank (uspto)

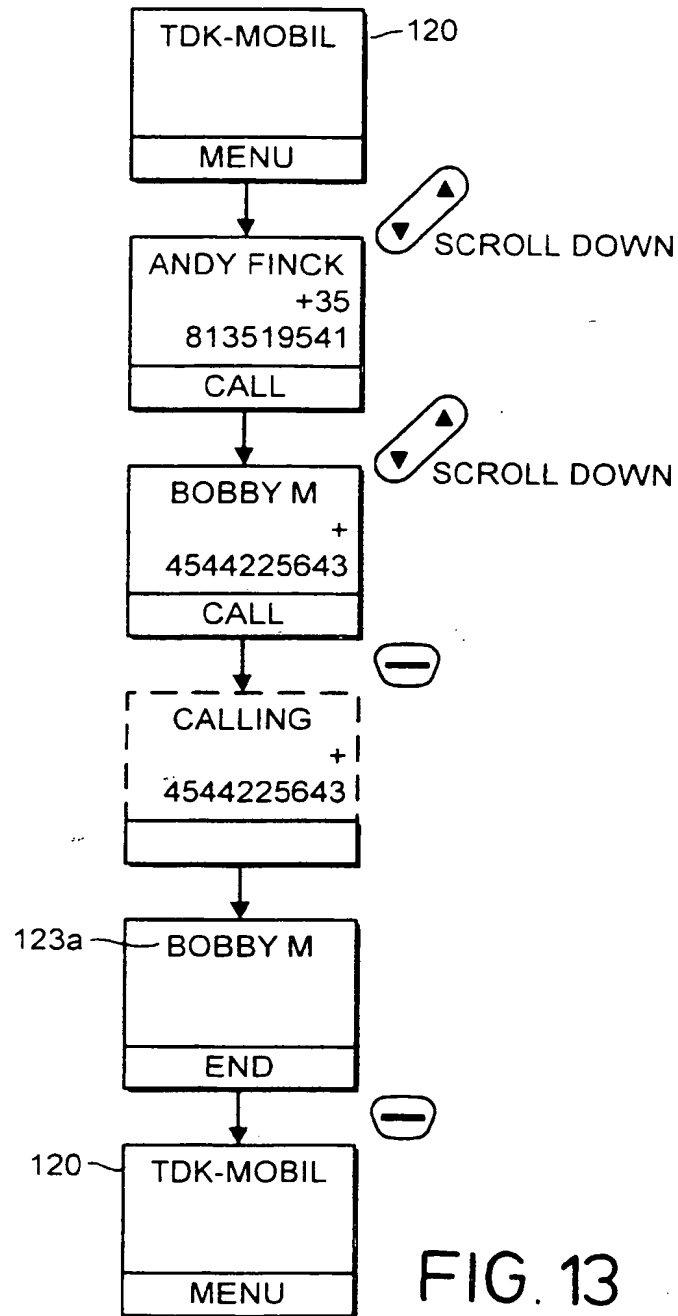


FIG. 13

This Page Blank (uspto)

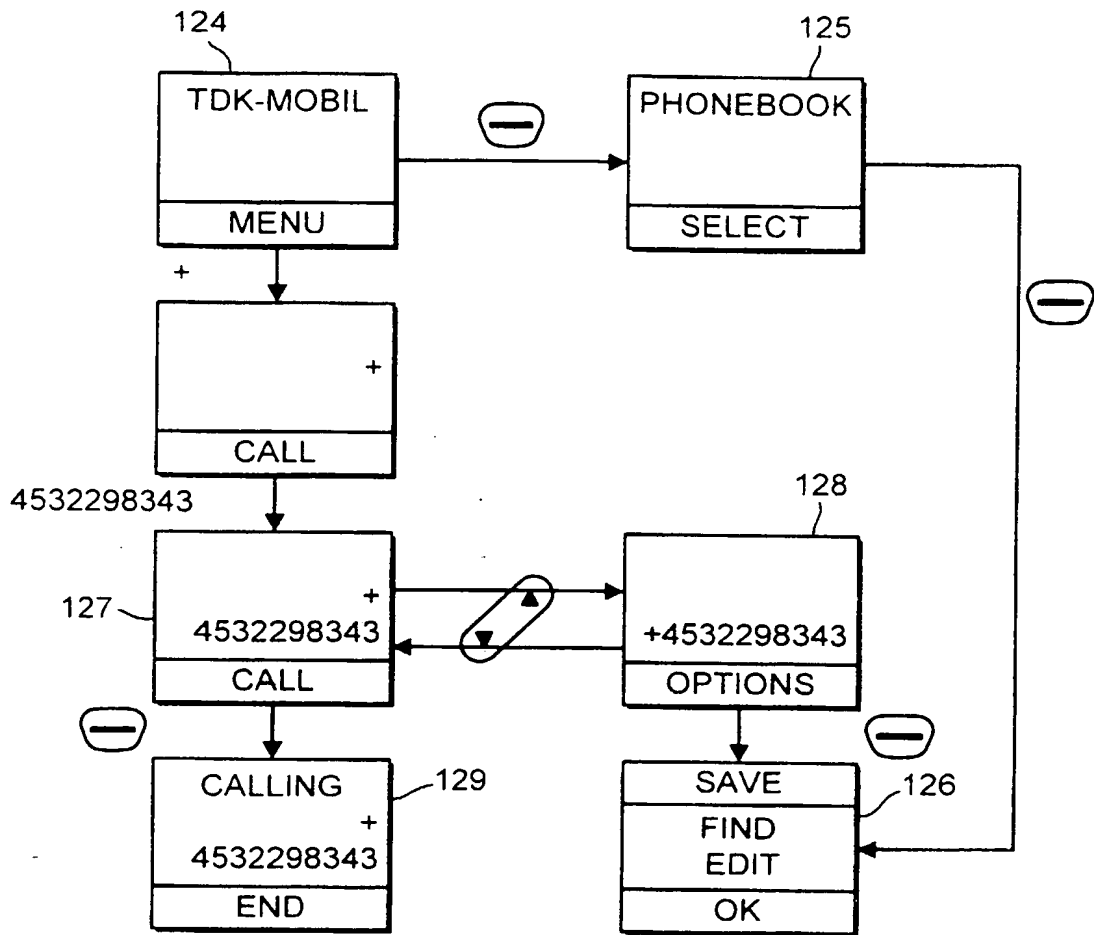


FIG. 14

This Page Blank (uspto)